CHEVILLE À FRAPPER UNIVERSELLE

YZZY



TÊTE FRAISÉE
YZF




TÊTE PLATE
YZP



TÊTE PLATE LARGE
YZPX



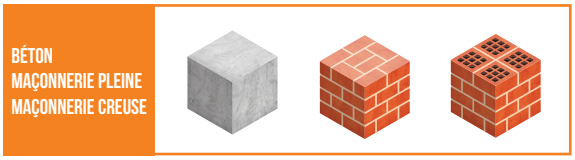

CARACTÉRISTIQUES


Matière:

- Cheville nylon
- Clou acier zingué 5.6 ou clou inox A4

Avantages:

- Cheville prémontée pour une pose rapide
- Clou fileté pour un démontage possible
- Design permettant un excellent guidage du clou lors de la pose
- Cheville déclinée en version tête plate, tête fraisée et tête large

MISE EN ŒUVRE

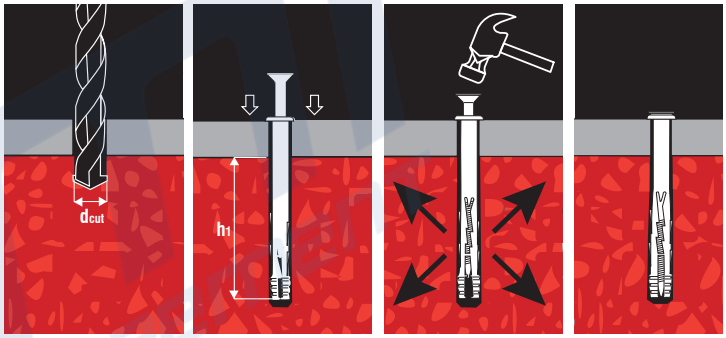


Percer le trou à d_{cut} et profondeur mini h_1


Insérer la cheville à travers l'objet à fixer

Frapper sur la tête du clou pour réaliser l'expansion de la cheville

DONNÉES DE MISE EN ŒUVRE

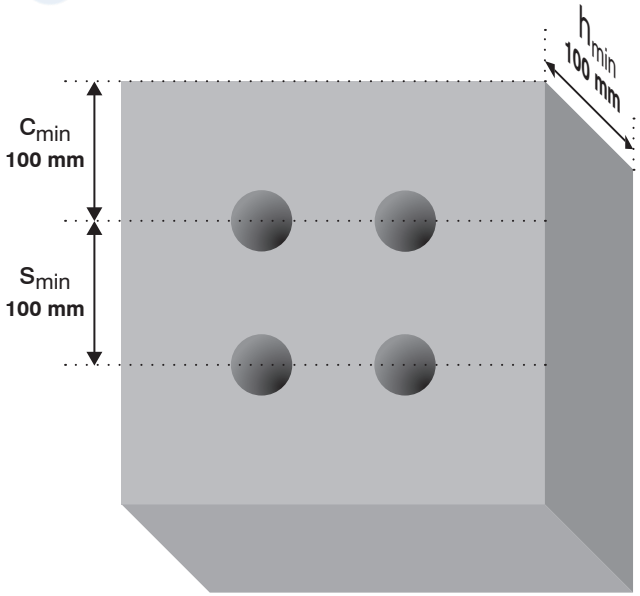


DIMENSIONS

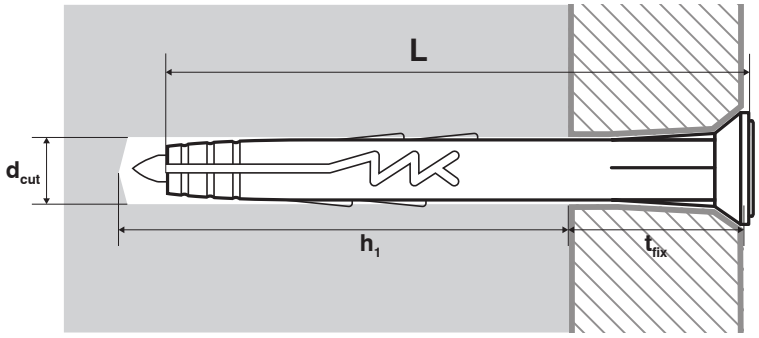

Ø	L	d_{cut} e	t_{fix} maxi	h_1	CLOU ACIER Tête plate	CLOU ACIER Tête fraisée	CLOU ACIER Tête large	CLOU INOX A4 Tête plate	CLOU INOX A4 Tête fraisée
mm	mm	mm	mm	mm					
5.0	27	5	5	25	**YZP5027**	**YZF5027**	-	**A4-YZP5027**	**A4-YZF5027**
	37	5	15	25	**YZP5037**	**YZF5037**	-	-	-
	47	5	25	25	**YZP5047**	**YZF5047**	-	-	-
6.0	32	6	5	30	**YZP6032**	**YZF6032**	**YZPX6032**	**A4-YZP6032**	-
	40	6	10	33	**YZP6040**	**YZF6040**	**YZPX6040**	**A4-YZP6040**	**A4-YZF6040**
	55	6	25	33	**YZP6055**	**YZF6055**	-	**A4-YZP6055**	**A4-YZF6055**
	67	6	37	33	**YZP6067**	**YZF6067**	-	-	-
	80	6	50	33	**YZP6080**	**YZF6080**	-	-	-
8.0	45	8	5	43	**YZP8045**	**YZF8045**	**YZPX8045**	**A4-YZP8045**	-
	60	8	20	43	**YZP8060**	**YZF8060**	-	**A4-YZP8060**	**A4-YZF8060**
	75	8	35	43	**YZP8075**	**YZF8075**	-	**A4-YZP8075**	**A4-YZF8075**
	100	8	60	43	**YZP8100**	**YZF8100**	-	**A4-YZP8100**	**A4-YZF8100**
	120	8	80	43	**YZP8120**	**YZF8120**	-	-	-
	135	8	95	43	**YZP8135**	**YZF8135**	-	-	-

CHARGES DE SERVICE

Les charges publiées ci-dessous sont données à titre indicatif.

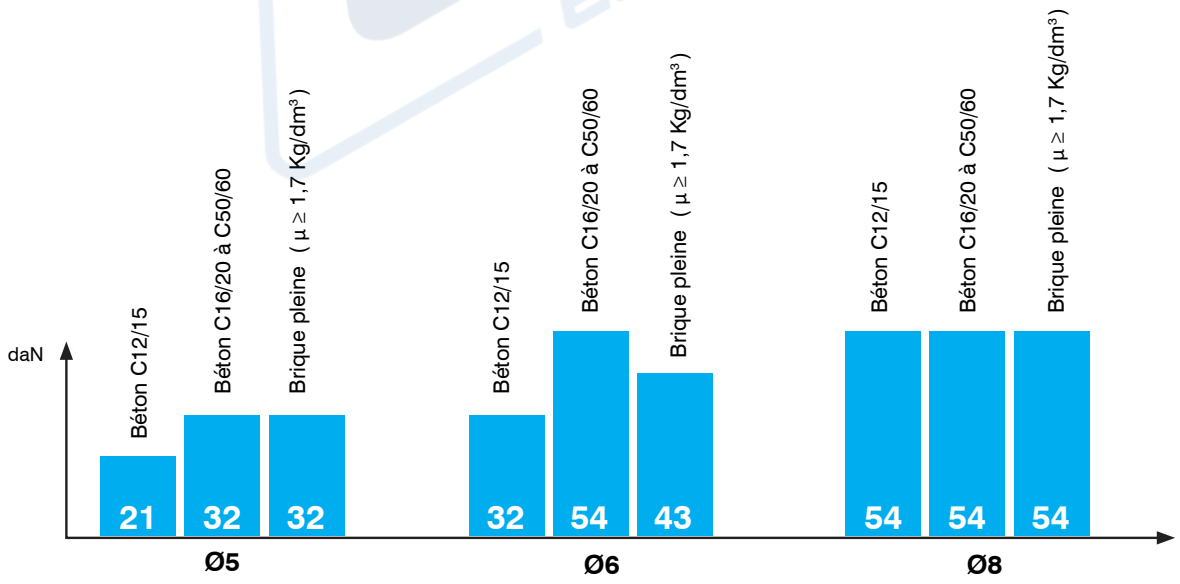

Scell-it®
SERVICE TECHNIQUE
28 rue Paul Dubrule - 59810 LESQUIN - Tél. : 03 20 32 98 18 - technique@scellit.com - www.scellit.com

HAMMER FIXING

YZZY



COUNTERSUNK HEAD
YZF




ROUND HEAD
YZP



LARGE ROUND HEAD
YZPX



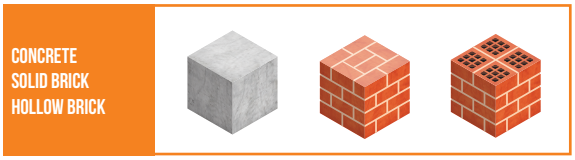

FEATURES


Matière:

- Nylon anchor
- Zinc plated nail 5.6 or A4 stainless steel nail

Avantages:

- Mounted anchor for quick installation
- Threaded nail to enable removal
- Design that allows excellent guidance of the nail.
- Exists in pan head, countersunk head and large flange head.

INSTALLATION

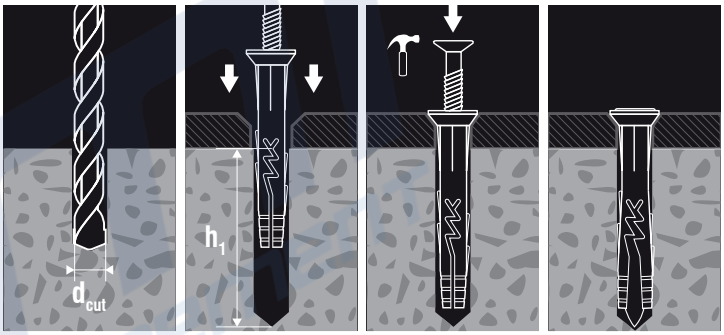


Drill the hole at Ø d_{cut} and depth mini h_1


Insert the anchor through the piece to fix

Hit on the nail head to expand the anchor

DIMENSIONS & APPLICATION DATAS

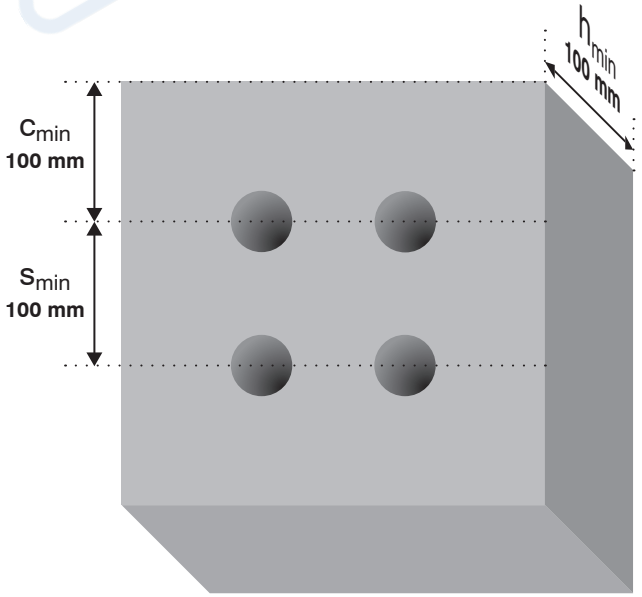


DIMENSIONS & APPLICATION DATAS

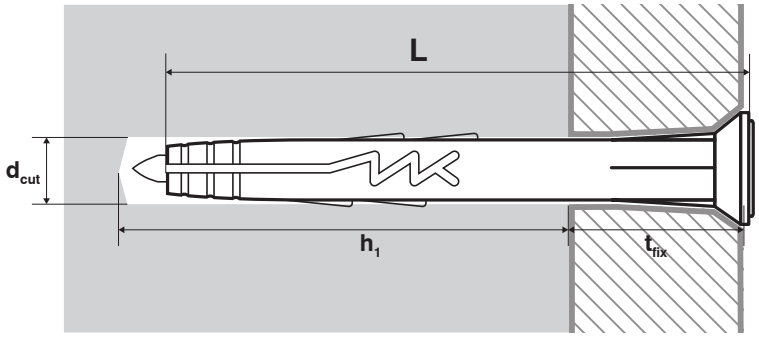

Ø	L	d_{cut} e	t_{fix} maxi	h_1	STEEL NAIL round head	STEEL NAIL countersunk head	STEEL NAIL large round head	A4 STAINLESS STEEL NAIL round head	A4 STAINLESS STEEL NAIL countersunk head
mm	mm	mm	mm	mm					
5.0	27	5	5	25	YZP5027	YZF5027	-	A4-YZP5027	A4-YZF5027
	37	5	15	25	YZP5037	YZF5037	-	-	-
	47	5	25	25	YZP5047	YZF5047	-	-	-
6.0	32	6	5	30	YZP6032	YZF6032	YZPX6032	A4-YZP6032	-
	40	6	10	33	YZP6040	YZF6040	YZPX6040	A4-YZP6040	A4-YZF6040
	55	6	25	33	YZP6055	YZF6055	-	A4-YZP6055	A4-YZF6055
	67	6	37	33	YZP6067	YZF6067	-	-	-
	80	6	50	33	YZP6080	YZF6080	-	-	-
8.0	45	8	5	43	YZP8045	YZF8045	YZPX8045	A4-YZP8045	-
	60	8	20	43	YZP8060	YZF8060	-	A4-YZP8060	A4-YZF8060
	75	8	35	43	YZP8075	YZF8075	-	A4-YZP8075	A4-YZF8075
	100	8	60	43	YZP8100	YZF8100	-	A4-YZP8100	A4-YZF8100
	120	8	80	43	YZP8120	YZF8120	-	-	-
	135	8	95	43	YZP8135	YZF8135	-	-	-

RECOMMENDED LOADS

Recommended loads below are for information purposes.

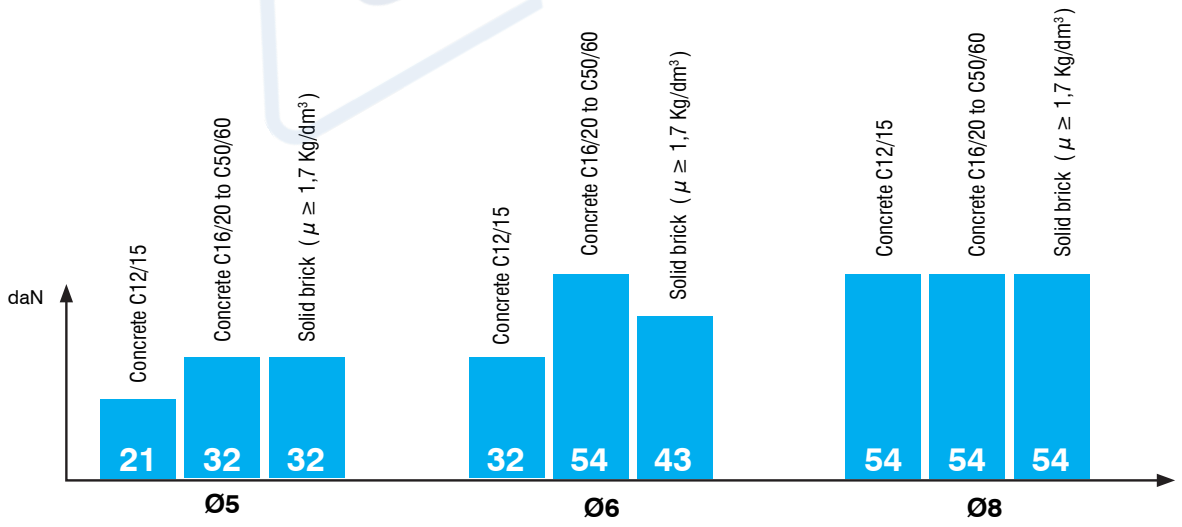

Scell-it®
SERVICE TECHNIQUE
Beacon way, Stafford, ST18 4DG - Tel. : 01785 246539 - technique@scellit.com - www.scellit.com