
KRATOS SAFETY
SOLUTIONS FOR LIFE

FA 60 007 04

CROSS LINE 2

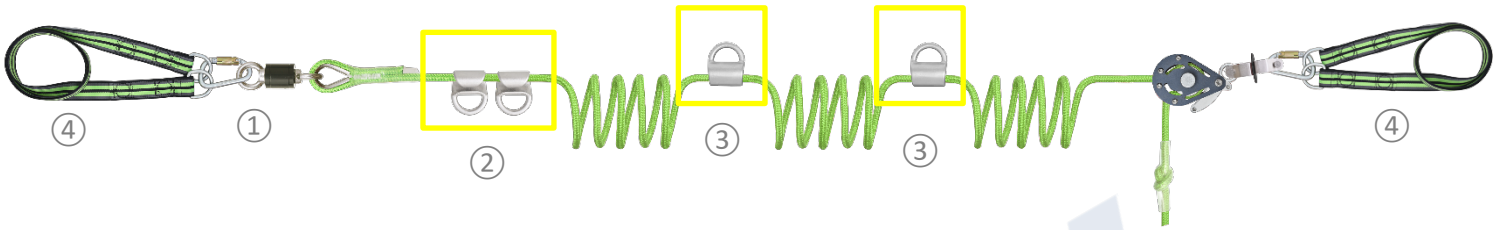


① 360°

② Anchor point (x2)

③

③ Intermediate (x2)
every 15 m

④ **INCLUDED**
2 x 2 m

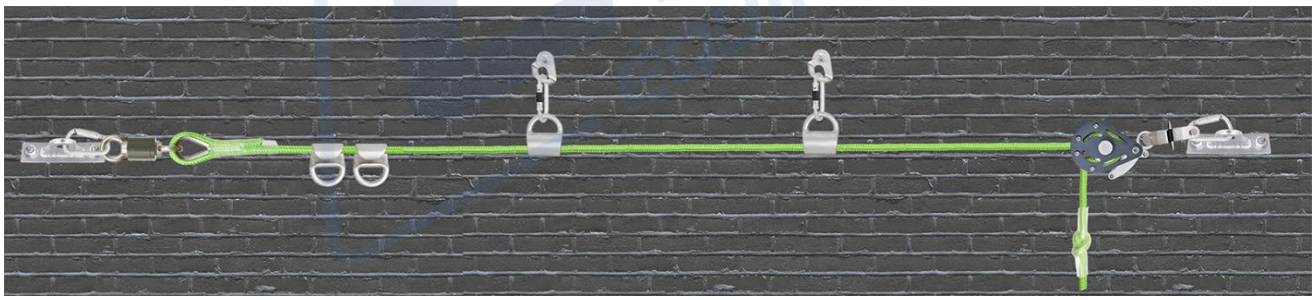



TRANSPORT BAG
INCLUDED
(FA 90 107 00)

HS CODE
63079098
CARTON SIZE / PCS.
40 x 40 x 24 cm / 1
AET (UE) N°2777/13802-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland


REF.	FA 60 007 04
CE	PPE regulation (EU) 2016/425 Annex II using EN 795 Type C, TS 16415 Type C
	x2 (0-45 m) x3 (0-30 m) x4 (0-25 m)
MAT.	 16 mm PES
R (kN) / MBS (kN)	18 kN / 23 kN
MAT. 	STEEL / ALU & INOX
LG. / f MIN. → MAX.	5m → 45m / 1.45 m → 7.83 m
+	**TENSION INDICATOR,** **REDUCED DEFLECTION,** **2 X 2 M EN 795 LANYARDS INCLUDED**
	14.11 KG



R (kN) / MBS (kN)

Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

MAT. 

LG. / f MIN. MAX.

Matière connecteur / tendeur
Material of connector / tensioner
Material del conector / tensor
Materia del connetore / tenditore
Material Verbinder / Spanner

Longueur mini → maxi / Flèche mini → maxi
Min. → Max. length / Min. → Max. deflection
Longitud mínima → máxima / Flecha mínima → máxima
Lunghezza min. → max. / Flessione min. → max.
Länge min. → max. / Dirchhang min. → max.