
ELIPSE® HALF-FACE MASK
+ HESPA™ P3 NUISANCE ODOUR DUST (R) Filters

TDS Technical DataSheet





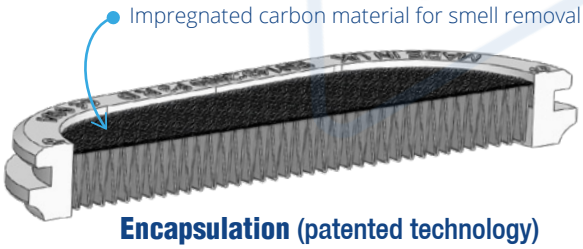

Encapsulation (patented technology)
645 mm; lenght of actual media in each filter



Standards
EN140: 1998 Mask Body
EN143: 2000+A1: 2006 P3 RD
CE 2797 - UKCA 0086

Efficiency
P3 >99,95% for 0,3 µ particulate

Weight
Mask + Filter: net (S/M) 132 g; (M/L) 140 g
gross (S/M) 187 g; (M/L) 195 g
Filter: net 19 g each; both net 38 g, gross 61 g

Shelf Live
5 years (mask & filters) See storage conditions on Instructions for Use.
Filters are re-usable and changeable.

Material
- **Mask:** Medical grade TPE Conforms to ISO 10993-10: 2010 for irritations. Mask body latex and silicone free, odour free. Valve Body in Nylon, Inhalation/Exhalation diaphragm in Silicone. 4 point adjustable elasticated head and neck strap with comfort pad in TPE.
- **Filters:** Mechanical type multi-layer HESPA Synthetic media with TPE flexible overmolded / encapsulated. Glued additional carbon activated impregnated media.

Production
United Kingdom, Italy, Romania
100% of filters NaCl Tested

	Code	Description	Quantity
	SPR337 (S/M) SPR502(M/L) SPR2344 (XL)	Elipse Half Mask complete with P3 Nuisance Odour filters	10 pcs. per box
	SPR336	Elipse P3 Nuisance Odour replacement filters	10 sets of 2 pcs. per box
	SPM001	Elipse Dust Mask Carry Case (Belt holder)	10 sets per box
	SPM414	Portacount Face Fit Kit adaptor	10 sets per box

Applications - dust, mist, fumes, ozone and smells

Welding and Grinding
Metal Fumes, Dust,
Ozone: up to 10 x WEL

Construction
Silica Dust, Abestos, Concrete Dust, Stone Dust, Aggregate Dust, Wood Dust, Cement Dust, Mold

Mining
Coal Dust, Silica Dust

Manufacturing
Glass Fibres, Composite Fibres, Lead Fumes

Food
Poultry, Powders (Dairy), Spices, Grain Dust

Pharmaceutical
Powders, Viruses