
PAD PEEL 4.0/4.8



PAD4.0-4.8RICHE


For installation information please refer to the tooling overview and manuals on our website www.scell-it.com
Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site web.
Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
Pro informace ohledně montáže navštivte naše webové stránky nebo nahlédněte do manuálu k nářadí.

ENGLISH	FRANÇAIS	DEUTSCH	CZECH
Mandrel : Steel	Tige : Acier	Dorn : Stahl	trn : Ocel
Body : Aluminium	Corps : Aluminium	Körper : Aluminium	dřík : Hliník
Dome head	Tête plate	Flachrundkopf	plochá hlava

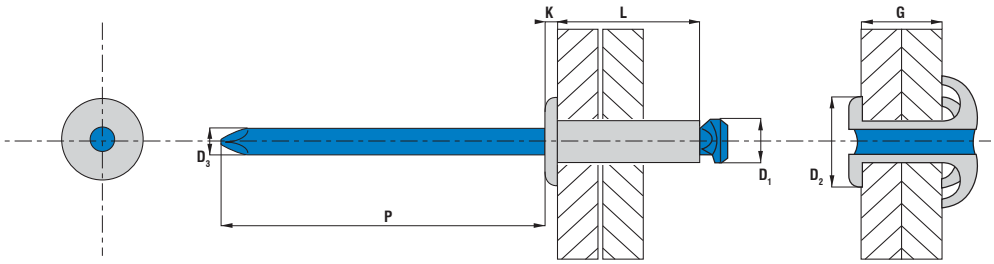

RoHS
Cr VI Free

PART NO/REF	D_1	L	D_2	K	D_3	P	G
	Ø (mm)	(mm) +1.0 / -0.2	Ø (mm)	(mm)	Ø (mm)	mini (mm)	min-max (mm)
PAD4010	4.0 +0.08 / -0.15	10.0	8.0 -0.3 / +0.3	1.40 -0.3 / +0.0	2.20	27	1.5-5.0
PAD4012		12.0					4.0-6.5
PAD4014		14.0					6.0-9.0
PAD4016		16.0					8.0-11.0
PAD4018		18.0					10.0-13.0
PAD4020		20.0					12.0-15.0
PAD4025		25.0					15.0-20.0
PAD4810	4.8 +0.08 / -0.15	10.0	9.5 -0.3 / +0.3	1.50 -0.3 / +0.0	2.70	27	0.5-4.0
PAD4812		12.0					2.0-6.0
PAD4814		14.0					4.0-8.0
PAD4816		16.0					6.0-10.0
PAD4818		18.0					8.0-12.0
PAD4820		20.0					10.0-14.0
PAD4825		25.0					16.0-19.0
PAD4830		30.0					19.0-24.0
PAD4835		35.0					24.0-29.0
PAD4840		40.0					29.0-34.0

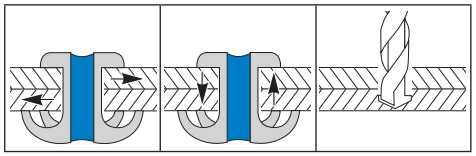

D_1 (mm)	(N)	(N)	Ø (mm)
4.0	1 270	1 150	4.2
4.8	1 855	1 600	5.0

UNIT PLANT CERTIFICATES

ISO 9001:2000
TS 16949

Scell-it®
Engineering & Development

© 2009 Blue future Intellectual Proterties

Data shown are subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Scell-it representative is at your disposal should you need to confirm latest information.